

EXC250003-00

EXC-0880-0840-0000-10-0208130

Combi-2 SLED 14-pin Butterfly Module 100nm

Revision: 0.2

Date: 16-Jan-2019

Confidentiality: **Confidential**

Prepared by: Stefan Gloor
(Project Manager)

Checked by: Jean Dahdah
(Laser Engineer)

Approved by: Philipp Vorreau
(Quality Manager)

Authorized by: Marcus Duelk
(Chief Technology Officer)

CONTENTS

1. SCOPE	3
PURPOSE.....	3
RESPONSIBILITY	3
2. REFERENCE DOCUMENTS	3
3. ELECTRO-OPTICAL PERFORMANCE (T_{SLED} = 25°C)	4
4. ABSOLUTE MAXIMUM RATINGS	5
5. SCREENING	5
6. PACKAGE DIMENSIONS AND PINOUT	6
7. FIBER AND CONNECTOR	7
8. IMPORTANT NOTES	7
9. ORDERING INFORMATION	7
10. REVISION HISTORY	8

1. SCOPE

PURPOSE

The purpose of this document is to specify the electro-optical performance and dimensions of a module with combined superluminescent light emitting diodes (SLED).

RESPONSIBILITY

EXALOS is responsible for establishing, implementing and maintaining this procedure. The Quality representative shall ensure that a timely Engineering Change Notice (ECN) is issued in accordance with EXALOS procedure for any changes.

2. REFERENCE DOCUMENTS

- EXS-WI-0001 Visual Inspection Criteria SLED Chip on Submount Procedure
- MIL STD 883 C method
- Bellcore GR-468-CORE

3. ELECTRO-OPTICAL PERFORMANCE ($T_{SLED} = 25^{\circ}C$)

Parameter	Symbol	Cond.	Min	Typ	Max	Unit
Combined Wavelengths: SLED A SLED B	λ_A λ_B			880 840		nm
Operating current: SLED A SLED B	$I_{op, A}$ $I_{op, B}$			180 110	200 120	mA
Total power ex-fiber	P_{tot}	$I_{op, max}$	6	8		mW
Center wavelength	λ_c	$I_{op, max}$	855	865	875	nm
Bandwidth at 3dB	BW_{3dB}	$I_{op, max}$	95	100		nm
Bandwidth at 10dB	BW_{10dB}	$I_{op, max}$	115	120		nm
Spectral ripple [RB=0.1nm]	SR	$I_{op, max}$		0.2	0.5	dB
Polarization extinction ratio	PER	$I_{op, max}$		13		dB
Monitor PD current ¹	I_{MPD}	$I_{op, max}$	0.1			mA
Monitor PD bias voltage	V_{MPD}		0		-12	V

Table 1: Electrical-optical characteristics

¹ Measured with 0V bias voltage on monitor photodiode (PD) and termination resistance of 10-50 Ohm.

4. ABSOLUTE MAXIMUM RATINGS

Stresses beyond the absolute maximum ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Parameter	Symbol	Cond.	Min	Max	Unit
Forward current: SLED A SLED B	$I_{F, A}$ $I_{F, B}$			220 150	mA
Reverse voltage: SLED A SLED B	$V_{R, A}$ $V_{R, B}$			-2 -2	V
Forward voltage: SLED A SLED B	$V_{F, A}$ $V_{F, B}$			3.0 2.5	V
Operating temperature	T_{op}	$I_{F,max}$	-20	65	°C
Storage temperature	T_{stg}		-40	85	°C
Storage humidity	<30°C >30°C		5	85 95	% r.h. % r.h.
Thermoelectric cooler voltage	V_{tec}	50°C ²		4.0	V
Thermoelectric cooler current	I_{tec}	50°C		1.8	A
Thermistor Resistance	R_{th}	25°C	9.5	10.5	kΩ
Thermistor constant	B		3892		K
Lead soldering temperature				260	°C
Lead soldering duration				10	s
ESD		human b.m		500	V

Table 2: Absolute maximum ratings

5. SCREENING


The produced Module is required to meet all operating conditions specified in Table 3, Electro-Optical Performance Specifications after being subjected to the following screening tests:

Test Item	Test Conditions	Reference
Seal	Fine: Condition A1 Gross: Condition C	MIL-STD-883, Method 1014 Temperature max 85°C
Temperature Cycling	-40°C to +85°C, ramp rate \geq 5°C/min 10 cycles	MIL-STD-883, Method 1010


Table 3: Screening tests

² Performance values with hot side temperatures of 50°C (housing base)

6. PACKAGE DIMENSIONS AND PINOUT

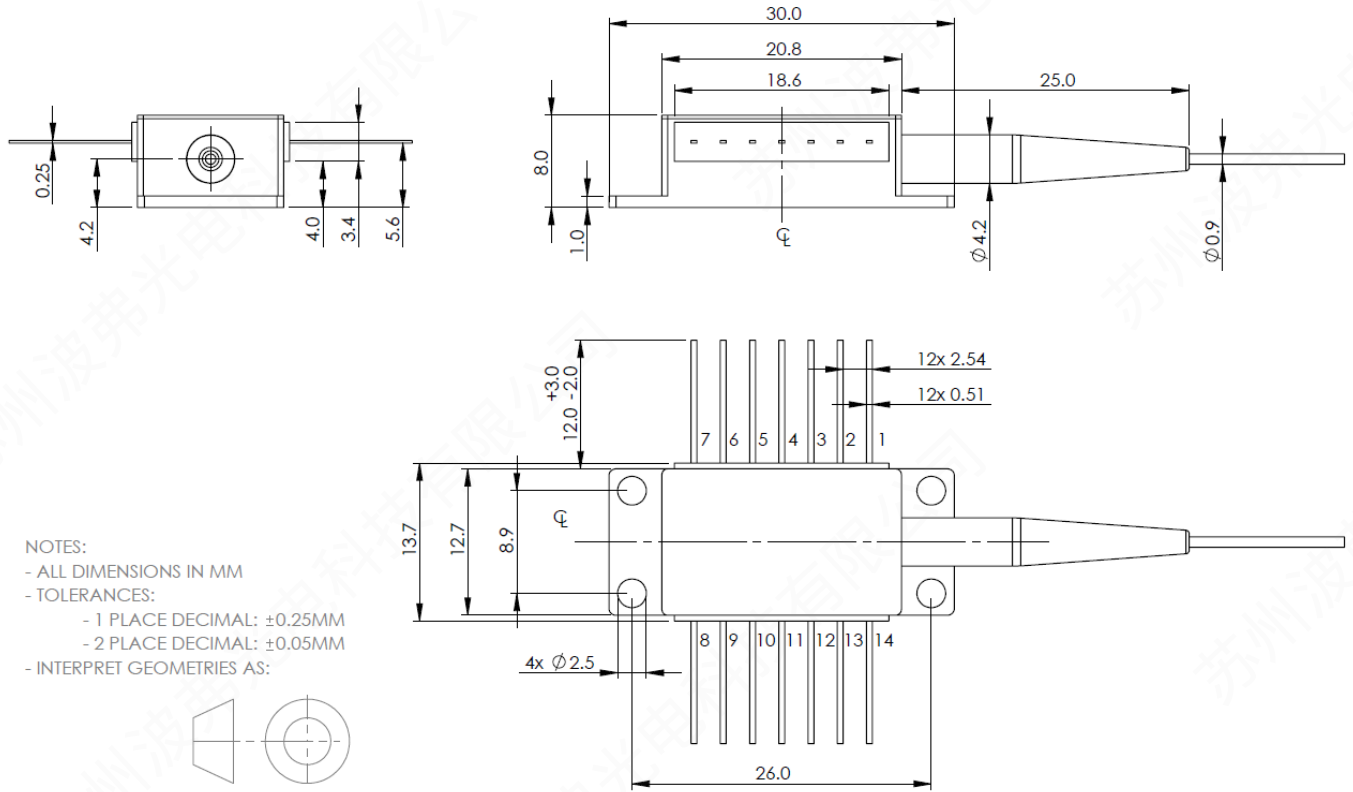

NOTES:
 - ALL DIMENSIONS IN MM
 - TOLERANCES:
 - 1 PLACE DECIMAL: $\pm 0.25\text{MM}$
 - 2 PLACE DECIMAL: $\pm 0.05\text{MM}$
 - INTERPRET GEOMETRIES AS:



Butterfly Package			
Pin	Function	Pin	Function
1	TEC (+)	8	SLED A ANODE (+)
2	CASE GROUND	9	SLED A CATHODE (-)
3	MONITOR DIODE ANODE (+)	10	SLED B ANODE (+)
4	MONITOR DIODE CATHODE (-)	11	SLED B CATHODE (-)
5	THERMISTOR (+)	12	NC
6	THERMISTOR (-)	13	NC
7	NC	14	TEC (-)

Table 4: 14pin Butterfly Pinout

7. FIBER AND CONNECTOR

Part	Description
SM Fiber	SM 5/125 Corning HI780
Tight buffer secondary coating	900 μm
Fiber pigtail length (min.)	1 m
Optical connector	FC/APC Narrow Key (2.0mm)

8. IMPORTANT NOTES

1. Avoid electrostatic discharges, which may destroy the SLEDs.
2. Never use the SLED module without heat sinking.
3. Adequate eye protection against laser radiation should be used while handling and operating the module.
4. EXALOS declines any responsibility if the device is used in applications where human life may be endangered.
5. Back-reflections may influence the output power and spectral characteristics of the SLEDs. An optical return loss of less than -30 dB is recommended.

9. ORDERING INFORMATION

Please use the following **part number** to order product from EXALOS:

EXC250003-00

Description of technical code:

E	X	C	-	0	8	8	0	-	0	8	4	0	-	0	0	0	0	-	1	0	-	0	2	0	8	1	3	0
				Wavelength A				Wavelength B				Wavelength C			Total output power			Package		Fiber		Connector		MPD		Option		

10. REVISION HISTORY

Revision History				
Rev.	Description	ECN	Date	Released
0.1	Preliminary version	-	04.12.2018	SGL
0.2	Updated drive current, output power, 3dB and 10dB BW, PER	-	16.01.2019	SGL